



5μm Guide Pin-Straight Type
5μm卸料板導柱-直型

HAP002-A

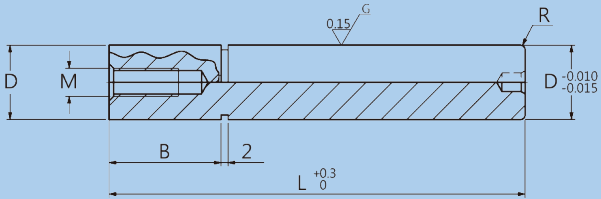

HAP002-B

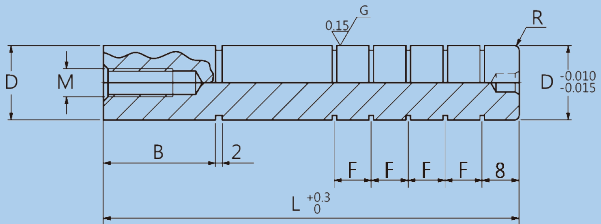

※ L<119.5 → F= 8
L>119.5 → F=10

Type 品名	Roundness 真圓度	Concentricity 同心(軸)度	Material 材質	Heat Treatment 熱處理	Hardness 硬度	Delivery 交貨日
HAP002-A HAP002-B	2μm	5μm	SUJ2(1.3505) 軸承鋼	Hardened 整體淬火	HRC62±2	3 Working Days 3 個工作日

(HAP002-B) Quantity of groove 油溝數量						
L \ G	2	3	4	5	6	
40	√					
50		√				
60		√				
70			√			
80				√		
90~					√	

Type	D	TOL	L	B	MxL	R
HAP002-A HAP002-B	8	+0.023 +0.016	40/50/60/70/80	10	M5x12	1.0
	10	+0.023 +0.016	40/50/60/70/80/90/100	13	M5x12	1.0
	13	+0.028 +0.019	40/50/60/70/80/90/100/110/120	16	M6x15	1.5
	16	+0.028 +0.019	50/60/70/80/90/100/110/120	20	M6x15	1.5
	20	+0.034 +0.023	60/70/80/90/100/110/120/130/140	25	M8x20	2.0
	25	+0.034 +0.023	70/80/90/100/110/120/130/140	28	M8x20	2.0

5μm Guide Pin-Straight Type
5μm卸料板導柱-直型

Order Ex. 訂購範例

HAP002-A-D-L

Alterations	追加加工名稱	Description 加工說明	Order Ex. 訂購範例
A		Length change 長度尺寸變更	HAP002-A-8-A38 Length change to 38mm 長度尺寸變更為38mm
C		Pressfit length change 壓入部長度變更	HAP002-A-8-40-C8 Pressfit length change to 8mm 壓入部長度變更為8mm
E		Taper machining of pin tip 前端錐度加工	HAP002-A-8-40-E