




HFP009

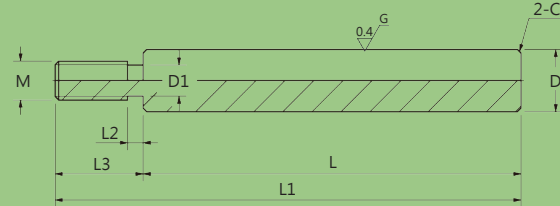

D (mm)	Roundness 真圓度(μm)
<13	0.004
<20	0.005
<30	0.006

D (mm)	Hardness Penetration 淬火深度(mm)	
	SUJ2	SUS440C
<10	0.5	0.5
<13	0.7	0.5
<20	0.7	0.7
<25	1.0	0.7

L (mm)	TOL 公差(mm)
<6	±0.1
<30	±0.2
<120	±0.3
<400	±0.5
<1000	±0.8
<1500	±1.2


Undercut Size List 退刀槽尺寸表					
M	D1	L2	M	D1	L2
6	4.4	2	16	13	4
8	6	3	20	16.4	5
10	7.7	3	24	19.6	5
12	9.4	4	30	25	5

Type 品名	Material 材質	Heat Treatment 熱處理	Hardness 硬度	Surface Treatment 表面處理	Coating Thickness 鍍膜厚度	Delivery 交貨日
HFP009-A	SUJ2(1.3505) 軸承鋼	Surface Hardened 高頻淬火	HRC58~	-	-	5 Working Days 5 個工作日
HFP009-C				Hard Chromium Electroplating 鍍硬鉻	5μm	
HFP009-D	SUS440C (1.4125) 不鏽鋼		HRC56~	-	-	
HFP009-B				-	-	

Type	D	TOL	L (u:1mm)	L3 (u:1mm)	M	Max.L1	C
HFP009-A HFP009-B HFP009-C HFP009-D	8	-0.005 -0.014	25~795	5≤L3≤Mx3	6	800	0.5
	10	-0.005 -0.014	25~795	5≤L3≤Mx3	6/8	800	0.5
	12	-0.006 -0.017	25~995	5≤L3≤Mx3	6/8/10	1000	0.5
	13	-0.006 -0.017	25~995	5≤L3≤Mx3	6/8/10/12	1000	0.5
	15	-0.006 -0.017	25~995	5≤L3≤Mx3	6/8/10/12	1000	0.5
	16	-0.006 -0.017	25~1195	5≤L3≤Mx3	6/8/10/12	1200	0.5
	18	-0.006 -0.017	25~1195	5≤L3≤Mx3	6/8/10/12/16	1200	0.5
	20	-0.007 -0.020	25~1195	5≤L3≤Mx3	6/8/10/12/16	1200	1.0
	25	-0.007 -0.020	25~1195	5≤L3≤Mx3	8/10/12/16/20/24	1200	1.0
	30	-0.007 -0.020	25~1495	5≤L3≤Mx3	8/10/12/16/20/24	1500	1.0

Order Ex. 訂購範例

HFP009-□-8-L-L3-M

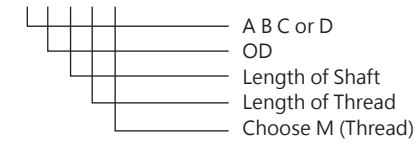

選擇導桿材質
外徑尺寸
導桿長度
螺紋長度
選擇螺紋M

Alterations	追加加工名稱	Description 加工說明	Order Ex. 訂購範例
A		Length tolerance change 長度公差變更	HFP009-A-8-100-10-M6-A(±0.03) Length tolerance change to ±0.03 長度公差變更為±0.03
C		Adds set screw flat 單平面或雙平面加工	HFP009-A-8-100-10-M6-C or 2C Adds set screw flats at one or two locations 單平面或雙平面追加
D		Decreases right angles 單90度平面或雙90度平面	HFP009-A-8-100-10-M6-D or 2D Right angles at one or two locations 單90度平面或雙90度平面
F		Adds key grooves 單鍵槽或雙鍵槽右工	HFP009-A-8-100-10-M6-F or 2F Key grooves at one or two locations 單鍵槽或雙鍵槽加工