


HFA049

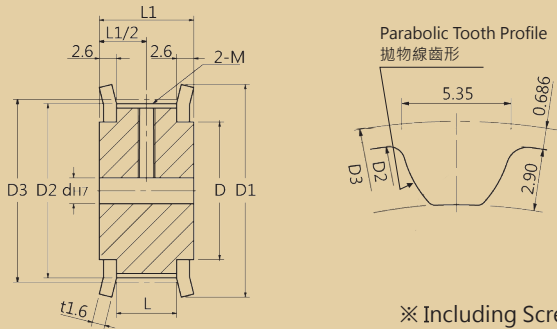

※ Including Screws 附螺栓

Type 品名	Material 材質	Surface Treatment 表面處理	Delivery 交貨日
HFA049-A	Aluminium 鋁合金	Anodizing 白色陽極	8 Working Days 8 個工作日
HFA049-B		Hard Anodizing 硬質陽極	
HFA049-C		Nickel Electroless 無電解鍍	
HFA049-D	S45C 中碳鋼	Blackening 染黑	
HFA049-E		Nickel Electroless 無電解鍍	


The Tapped Hole Dimensions 螺紋孔尺寸表	
d	M
12	4
13~17	5
18~30	6
31~45	8
46~62	10
※ Apply for Hole Alteration II、III 適用於II、III加工服務	

Hole Alteration 孔加工服務	I Hole 孔	II Hole+Tap 圓孔+攻牙	III Keyway+Tap 鍵槽孔+攻牙	IV Stepped Hole 軸頸孔	V Both Ends Stepped Hole 雙邊軸頸孔	※ keyway Dimension Please Refer Page 199 ※ 鍵槽加工尺寸表請參考 第199頁

Type	Teeth	d(I) (u:1mm)	d(II) (u:1mm)	d(III) (u:1mm)	d(IV) (u:1mm)	d1(IV) (u:1mm)	d(V) (u:1mm)	d2&d3(V) (u:1mm)	L2(IV) (u:1mm)	L3&L4(V) (u:1mm)	Belt Width 皮帶寬度 (L/L1)	Aluminium 鋁 D D1	S45C 鋼 D D1	D2	D3		
HFA049-A HFA049-B HFA049-C HFA049-D HFA049-E	20	12~22	12~22	12~22	12~14	12~18	12~22	18~26	3≤L2≤L1-3	3~23	15mm 16.8/22	40	55	42.5	55	49.56	50.93
	22	12~25	12~25	12~25	12~17	12~21	12~25	18~30				45	61	45	62	54.65	56.02
	24	12~28	12~28	12~28	12~18	12~23	12~30	18~35				50	67	50	66	59.74	61.12
	26	16~30	16~30	16~30	16~20	16~25	16~30	21~40				58	74	56	73	64.84	66.21
	28	16~34	16~34	16~34	16~24	16~29	16~30	21~42				60	80	63	79	69.93	71.30
	30	16~35	16~35	16~35	16~25	16~30	16~35	21~50				63	83	67	82	75.02	76.39
	32	16~38	16~38	16~38	16~28	16~32	16~35	21~50				67	87	71	86	80.12	81.49
	34	16~42	16~42	16~42	16~30	16~35	16~35	26~55				75	95	77	91	85.21	86.58
	36	16~45	16~45	16~45	16~30	16~38	16~38	26~60			80	99	80	97	90.30	91.67	
	40	20~50	20~50	20~50	20~30	20~40	20~42	27~65			90	111	90	107	100.49	101.86	
	44	20~55	20~55	20~50	20~30	20~43	20~50	27~72			100	119	102	119	110.67	112.05	
	48	20~62	20~62	20~50	20~35	20~50	20~50	27~80			105	127	112	127	120.86	122.23	
	50	20~62	20~62	20~50	20~35	20~50	20~50	27~80			115	135	120	135	125.95	127.32	
	60	20~62	20~62	20~50	20~35	20~50	20~50	27~80			140	160	140	158	151.42	152.79	

Order Ex. 訂購範例

HFA049-□-20-□-d-(d1-d2-d3)-□-(L2-L3-L4)-P8M-A



A B C D or E
Teeth
I II III IV or V
Internal Diameter of Hole
Internal Diameter of Hole(IV Type)
Internal Diameter of Hole(V Type)
Internal Diameter of Hole(V Type)
Width of Timing Pulley(15/25mm)
Length of Hole(IV Type)
Length of Hole(V Type)
Length of Hole(V Type)

選擇皮帶輪材質及表面處理方式
齒數
選擇孔加工類型(I/II/III/IV/V)
軸孔內徑
軸孔內徑(適用於IV型)
軸孔內徑(適用於V型)
軸孔內徑(適用於V型)
皮帶輪寬度(15/25mm)
軸孔長度(適用於IV型)
軸孔長度(適用於V型)
軸孔長度(適用於V型)

Alterations	追加加工名稱	Description 加工說明	Order Ex. 訂購範例
O		Set Screw Angle 變更止迴螺絲角度	HFA049-A-20-I-12-15-P8M-A-O Set Screw Angle Change From 120° to 90° 止迴螺絲角度從120°變更為90°
P		Side Tapped Hole(3/4/6) 側面攻牙孔加工(3/4/6孔)	HFA049-A-20-I-12-15-P8M-A-P3 Side Tapped 3 Holes 側面攻牙孔加工(3孔)
Q		Side Through Hole(3/4/6) 側面貫穿孔加工(3/4/6孔)	HFA049-A-20-I-12-15-P8M-A-Q4 Side Through 4 Holes 側面貫穿孔加工(4孔)
R		Flange not Attached 法蘭不鉚接	HFA049-A-20-I-12-15-P8M-A-R Flange not Attached 法蘭不鉚接
S		Flange Cut 法蘭切割	HFA049-A-20-I-12-15-P8M-A-S Flange Cut 法蘭切割
T		Tapped Hole Dimensions 牙孔尺寸變更	HFA049-A-20-I-12-15-P8M-A-T Tapped Hole Dimensions Change 牙孔尺寸變更