


Flexible Coupling-Single Disk Type

柔性聯軸器-單膜片類型

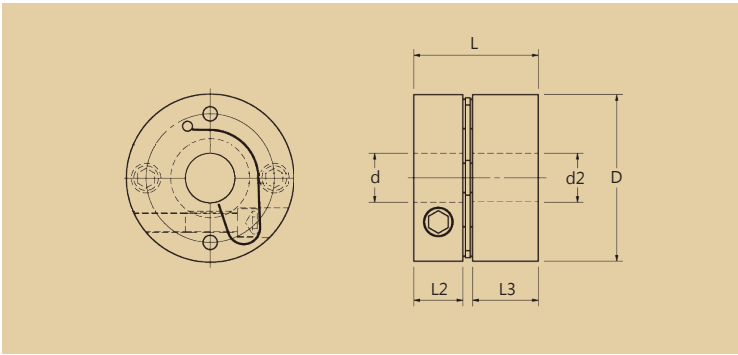

Type 項次	Material 材質	Surface Treatment 表面處理	Delivery 交貨日
HW-ACS	High tensile aluminum alloy 高強度鋁合金	Alumite 耐酸鋁 Black oxidation coating 黑色氧化膜	14 Working Days 14 個工作日
	Stainless steel 不鏽鋼		
	SCM 鉻鉬鋼		
	S45C 中碳鋼		

Type	d1、d2選擇 (d1≤d2)															d3	D	L	L2	鎖緊螺栓 M N·m						
HW-ACS	3	4	4.5	5	6	6.35	8									8.5	19.6	16.9	7.8	M2	0.4					
	4	4.5	5	6	6.35	8	9	9.525	10							12.5	27	19.3	9	M2.6	1.0					
					5	6	6.35	8	9	9.525	10	11	12	14			15	34	21.8	10	M3	1.5				
					6	6.35	8	9	9.525	10	11	12	14	15	16			17.5	39	26.5	12	M4	3.5			
						8	9	9.525	10	11	12	14	15	16	17	18	19	20			22	44.8	28.5	13	M4	3.5
							10	11	12	14	15	16	17	18	19	20	22	24	25			26	56	34.8	16	M5

	容許扭矩 N·m	扭力彈性常數 N·m / rad	容許偏角 °	容許偏心 mm	容許軸端間隙 mm	最高轉速 min ⁻¹	慣性力矩 x10 ⁻⁴ /kg·m ²
產品參數	1.0	2500	1.0	0.02	±0.12	10000	0.62
	2.0	4000	1.0	0.02	±0.18	10000	2.58
	5.0	13000	1.0	0.02	±0.23	10000	7.14
	8.0	23000	1.0	0.02	±0.25	10000	14.80
	12.0	28000	1.0	0.02	±0.30	10000	27.6
	25.0	60000	1.0	0.02	±0.38	10000	83.1

※ u=unit

Visit us : www.hdw.com.tw
Contact : headway@hdw.com.tw

Coupling
聯軸器