


HFP075

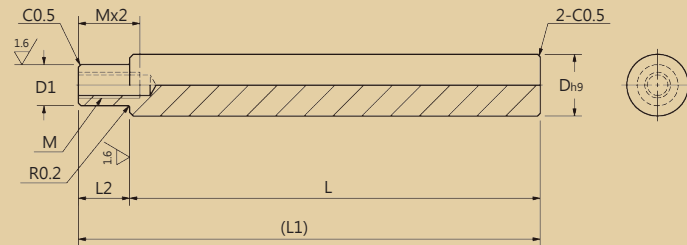

Type 品名	Material 材質	Surface Treatment 表面處理	Delivery 交貨日
HFP075-A	S45C 中碳鋼	Blackening 染黑	8 Working Days 8 個工作日
HFP075-B		Nickel Electroless 鍍無電解鎳	
HFP075-C	SUS304 不鏽鋼	-	

D Choose Tolerance of Outsize Diameter 選擇外徑公差			
	I	II	III
TOL.	h9	h7	g6
3	0 -0.025	0 -0.010	-0.002 -0.008
3.1~6	0 -0.030	0 -0.012	-0.004 -0.012
6.1~10	0 -0.036	0 -0.015	-0.005 -0.014
10.0~18	0 -0.043	0 -0.018	-0.006 -0.017
18.1~30	0 -0.052	0 -0.021	-0.007 -0.020
30.1~50	0 -0.062	0 -0.025	-0.009 -0.025


D1 Choose Tolerance of Outsize Diameter 選擇外徑公差		
	IV	V
TOL.	h9	h7
3	0 -0.025	0 -0.010
3.1~6	0 -0.030	0 -0.012
6.1~10	0 -0.036	0 -0.015
10.0~18	0 -0.043	0 -0.018
18.1~30	0 -0.052	0 -0.021
30.1~50	0 -0.062	0 -0.025

Tolerance of Length 長度公差	
L	TOL.
2~6	±0.1
7~30	±0.2
31~120	±0.3
121~400	±0.5
401~800	±0.8

Type	D	D1(u:1mm)	L(u:0.1mm)	L2(u:0.1mm)	M(粗螺紋)	L1(max.)
HFP075-A	6	5	20.0~298.0	2≤L2≤D1x5	3	300
	8	M3~M8時	20.0~398.0	2≤L2≤D1x5	3/4/5	400
	10	M+2≤D1<D	20.0~498.0	2≤L2≤D1x5	4/5/6	500
	12	M10~M16時	25.0~598.0	2≤L2≤D1x5	5/6/8	600
HFP075-B	15	M+3≤D1<D	25.0~698.0	2≤L2≤D1x5	5/6/8/10	700
HFP075-C	20	M20、M24時	30.0~798.0	2≤L2≤D1x5	5/6/8/10/12	800
	25	M+4≤D1<D	30.0~798.0	2≤L2≤D1x5	5/6/8/10/12/16	800
	30	M30時	30.0~798.0	2≤L2≤D1x5	8/10/12/16/20	800
	35	M+5≤D1<D	40.0~798.0	2≤L2≤D1x5	8/10/12/16/20/24	800

Order Ex. 訂購範例

HFP075-□-6-D1-L-L2-M-□-□

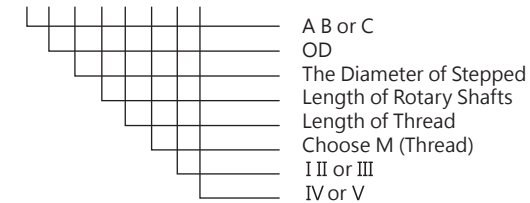

選擇材質
外徑尺寸
軸頸外徑
選擇旋轉軸長度
螺紋長度
選擇螺紋M
D公差選擇
D1公差選擇

Alterations	追加加工名稱	Description	加工說明	Order Ex. 訂購範例
A		Length tolerance change 長度公差變更		HFP075-A-6-5-100-20-M3-I-IV-A(±0.03) Length tolerance change to ±0.03 長度公差變更為±0.03
C		Adds set screw flat 單平面或雙平面加工		HFP075-A-6-5-100-20-M3-I-IV-C or 2C Adds set screw flats at one or two locations 單平面或雙平面追加
F		Adds key grooves 單鍵槽或雙鍵槽加工		HFP075-A-6-5-100-20-M3-I-IV-F or 2F Key grooves at one or two locations 單鍵槽或雙鍵槽加工
M		Slit cam grooves 開縫凸輪用溝槽加工		HFP075-A-6-5-100-20-M3-I-IV-M Slit cam grooves 開縫凸輪用溝槽加工